



Downview Table DVT 36", 48", 60" & 72"

Assembly Instructions

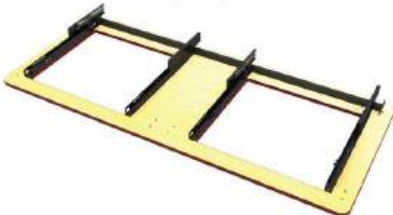

How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.

50mm Furniture Bolt  Qty:4	20mm Furniture Bolt  Qty:20	3/8" Wrench  Qty:1	8mm LCD Flat Screen Mounting Screw  Qty:4 for 36" & 48" Qty:8 for 60" & 72"	10/24 x 1/2 Carriage Bolt  Qty:4 for 36" & 48" Qty:8 for 60" & 72"
Caster & Caster with Lock  OPTIONAL Qty:2	4mm Allen Wrench  Qty:1	Leveler / Glider  Qty:4	Zip Tie & Curly Tie  Qty:5	
10/24 Lock Nuts 10 Nylon Washer  Qty:4 for 36" & 48" Qty:8 for 60" & 72"	1" 7/8 Velcro Pads 2 Velcro Loops 2 Velcro Hooks  Qty:4	Glass  Qty:1 for 36" & 48" Qty:2 for 60" & 72"	Top Shelf Platform 36", 48", 60" or 72" Wide  Qty:1	
Side Frame (L & R)  Qty:2	Cross Support  Qty:1	Cable Management Tray  Qty:1	Kick Panel  Qty:1	
	Pivot Arm  Qty:1 for 36" & 48" Qty:2 for 60" & 72"		Kick Panel Extension L & R  Qty:2	Keyboard Tray  Qty:1 for 36" & 48" Qty:2 for 60" & 72"
Cable Management Clip  Qty:3 for 36" & 48" Qty:6 for 60" & 72"			LCD Holder  Qty:1 for 36" & 48" Qty:2 for 60" & 72"	ECPU Holder  Qty:1 for 36" & 48" Qty:2 for 60" & 72"

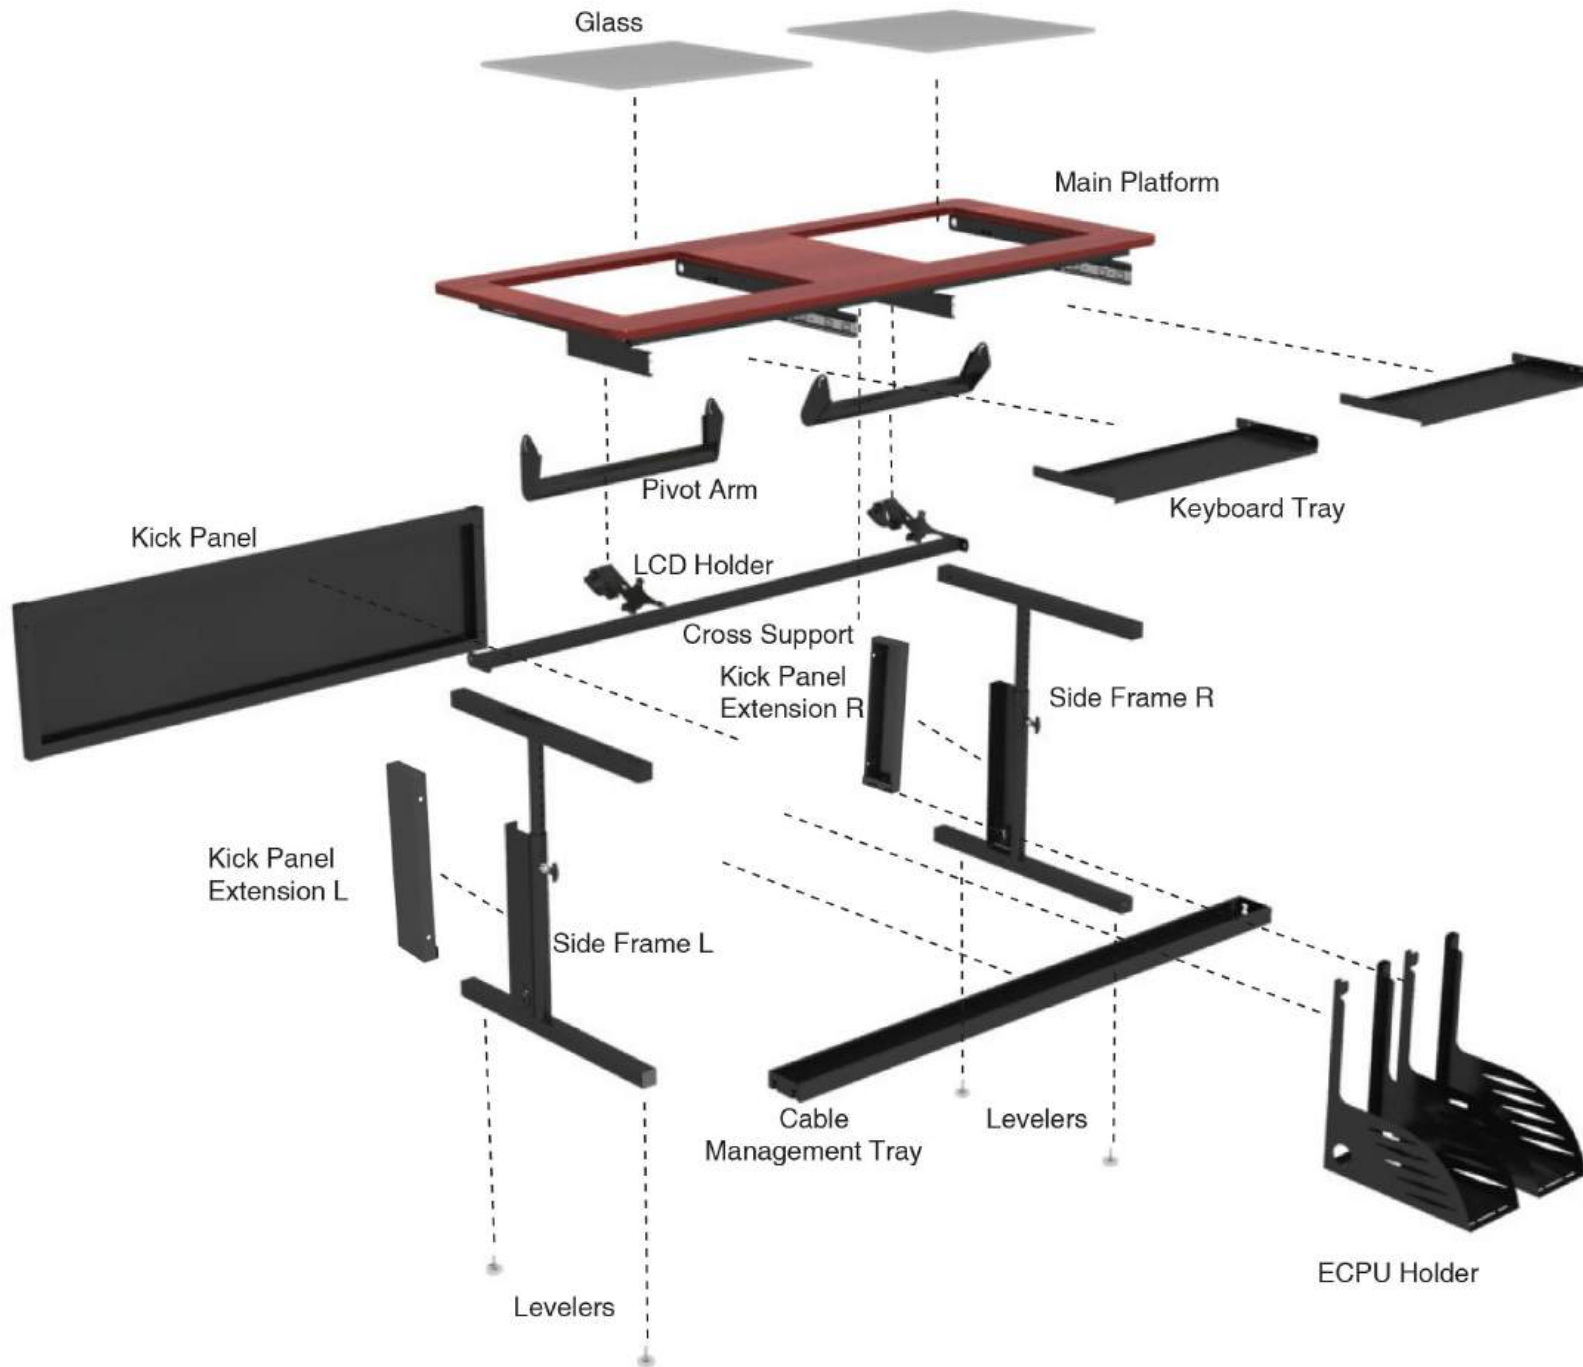

Step 1


Insert Levelers

Insert Levelers into Side Frames.

Leveling Glide



Qty:4

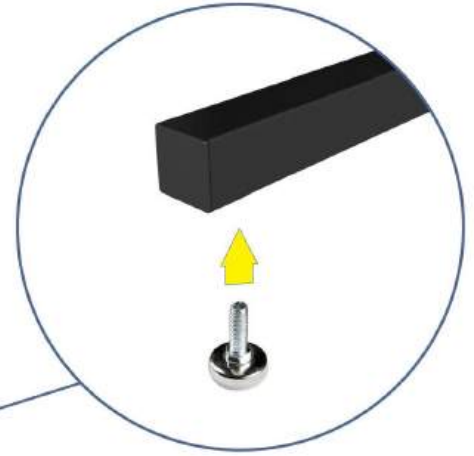

Step 2


Kick Panel Extensions

Attach Left and Right Kick Panel Extensions using (2) 20mm Furniture Bolts on each .

20mm
Furniture Bolt



Qty:4

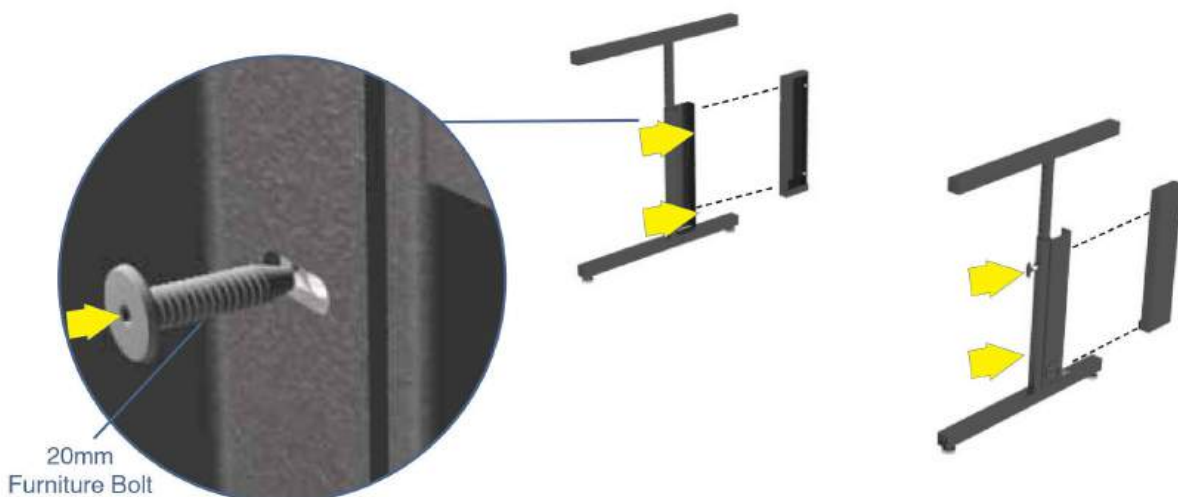

Step 3


Attach Cable Management Tray

20mm
Furniture Bolt



Qty:4

Attach Cable Management Tray to Kick Panel Extensions using (2) 20mm Furniture Bolts on each side. Insert Bolts half way through the Kick Panel Extensions then drop the Cable Management Tray.

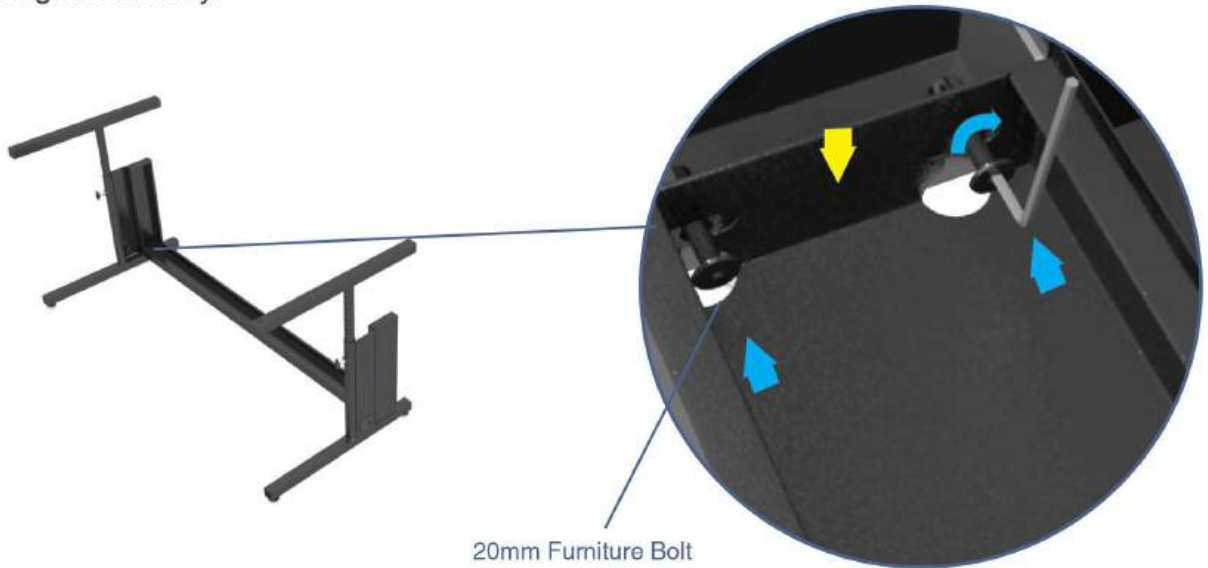

20mm Furniture Bolt

Step 4


Attach Kick Panel

Attach Kick Panel down to Side Frames using (4) 20mm Furniture Bolts.

20mm Furniture
Bolt



Qty:4

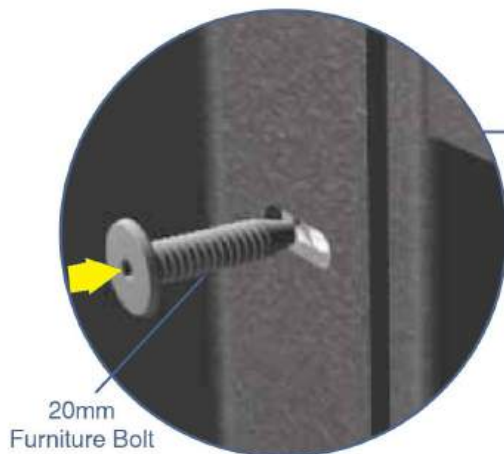


20mm
Furniture Bolt



Step 5

Attach Cross Support


Attach Cross Support to Frames using (2) 20mm Furniture Bolts on each side.

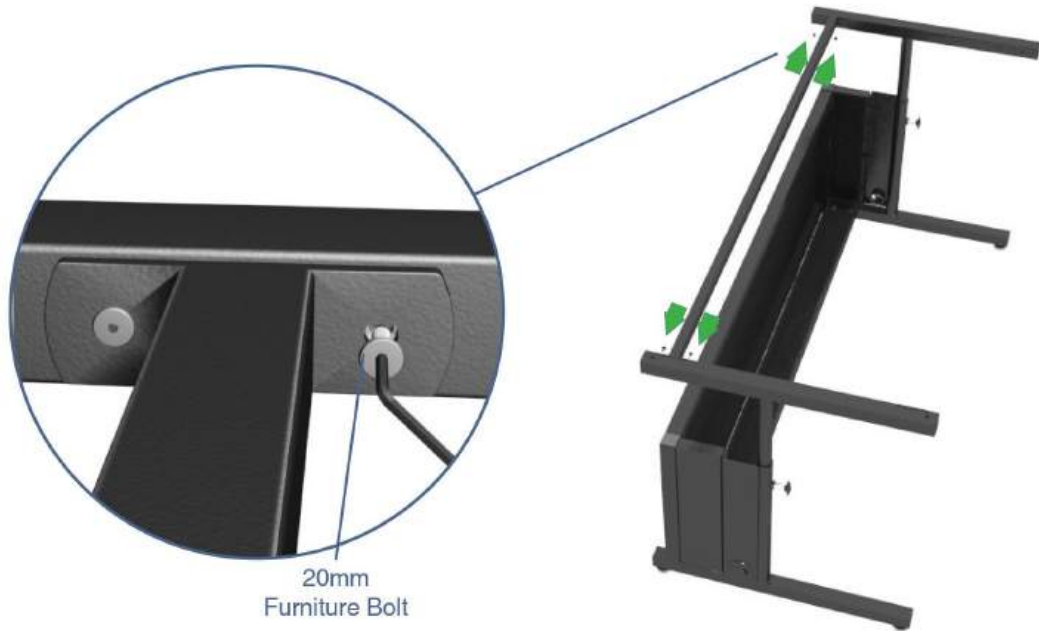

Step 6

Attach Pivot Arm

Attach Pivot Arm using (8) 10/24 x 1/2 Carriage Bolts, (8) 10/24 Lock Nuts and (8) 10 Nylon Washers. Do not fully tighten until monitor is installed and placed in desired location.

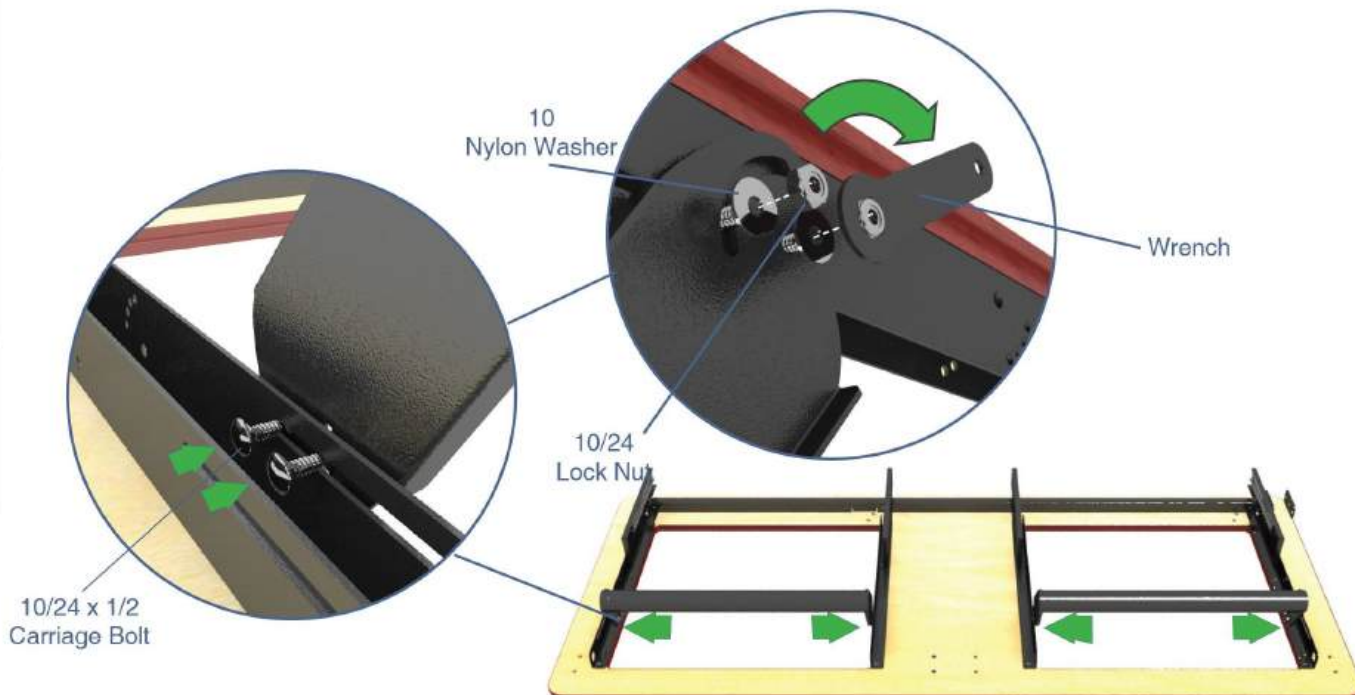

Step 7

Attach LCD Holder

Attach LCD Holder using (4) 3/8 - 16 x 1" Socket Head Bolt, (2) Clamps and (4) T Knobs on each LCD holder.

T Knob



Qty:2

3/8-1/6 x 1"

Socket Head Bolt



Qty:2

3/8 - 1/6 1"

Socket Head Bolt

T-Knob

LCD HOLDER

Step 8

Flip over Main Surface

Flip over Main Surface and place it on the Frame.



Step 9

Attach Cross Beam and Main Platform

Attach Cross Beam to Frame using (2) 20mm Furniture Bolts on each side. Attach Main Platform to Frame using (2) 50mm Furniture Bolts on each side.

50mm Furniture Bolts



Qty:4


20mm Furniture Bolt



Qty:4



20mm Furniture Bolt



50mm Furniture Bolt



Step 10

Slide in Keyboard Trays

Slide in Keyboard Trays.



Step 11


Attach LCD Monitor

8mm Phillips
Machine Screw





Qty: 4


Attach Monitor using (4) 8mm Phillips Machine Screws on each LCD monitor.

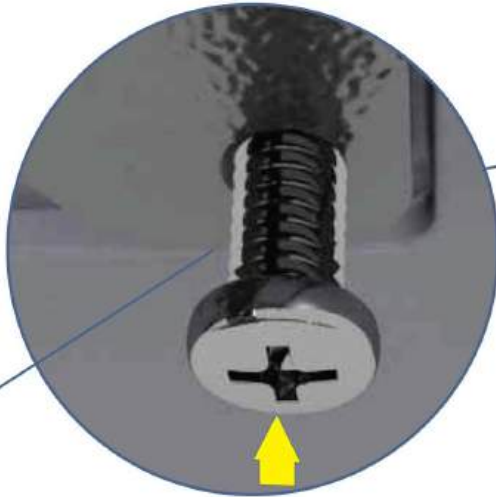

8mm Phillips
Machine Screw

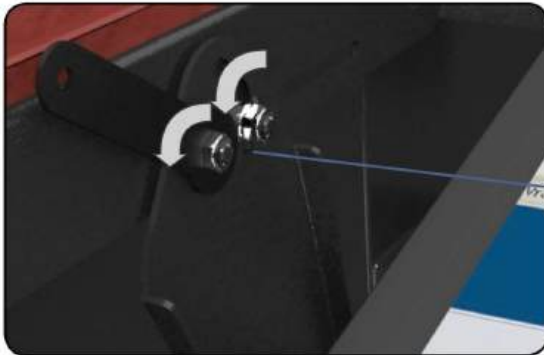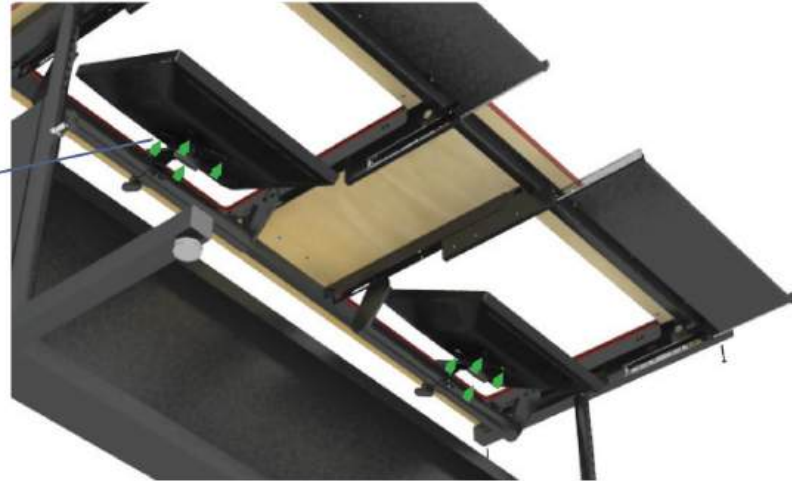

Loose 10/24 Lock Nuts to adjust the desired monitor angle. Then tighten back once the monitor position is set.

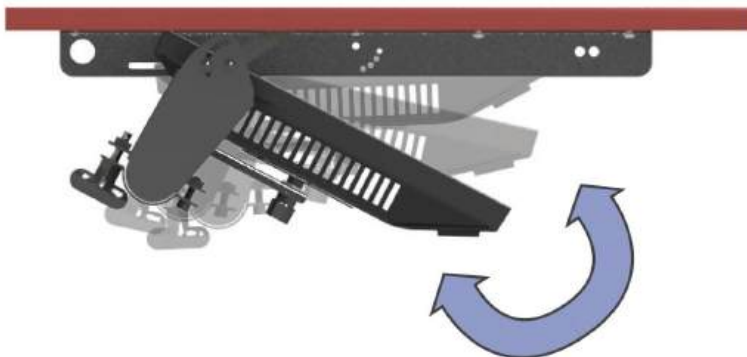

Step 12


Wire Management Clips

Cable
Management
Clip



Insert Wire Management Clips to Channels on surface and run cables and extenders through for a cleaner look.

Qty:3 for 36" & 48"
Qty:6 for 60" & 72"

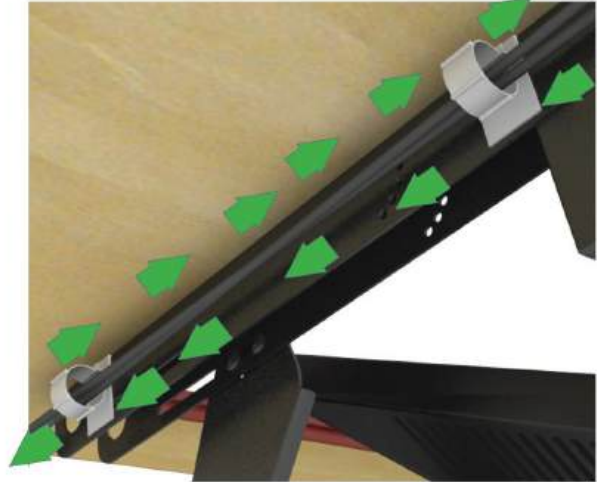

Step 13

Place Glasses

Glass



Place Glasses.

Qty:1 for 36" & 48"
Qty:2 for 60" & 72"



Step 14

ECPU Holder Assembly

Place ECPU Holder. Tack into top channel and lay on Cable Management tray.



How can we improve our assembly instructions?
Your comments and suggestions are important to us.
Please e-mail us at: support@versatables.com.